



Anchor Catalogue



Anchor Installation Guide



Lifeline Catalogue



Lifeline Installation Guide



Ladder Catalogue



Ladder Installation Guide



FrogLine In Use



FrogLink Install Video



TileLink Install Video

# EYEBOLT

Abseil Eyebolt Anchor | [www.safetylink.com.au](http://www.safetylink.com.au)



- ✓ Available to attach to a multitude of differing bases for differing structures (not to be used with surface mounted anchor).
- ✓ Unique energy absorbing capabilities, protecting structures and users in the event of a fall.
- ✓ Multi-directional fall protection.
- ✓ Single person anchor.
- ✓ Rated at 15kN.
- ✓ Complies with Australian and New Zealand Standard AS/NZS 1891.4.
- ✓ Abseiling eyebolts are to be used for rope access (abseiling and fall arrest).

### What am I used for?

The **Abseiling Eyebolt** is a fall arrest anchor which uses the same tapered design as the standard eyebolt but incorporates a shorter shaft enabling the eyebolt to withstand a live load without activating the bending motion that occurs when arresting a fall.

### POSITIONING OF SAFETYLINK ANCHOR POINT

*(refer to appendix diagram 2 of the Installation Handbook)*

The first must be in a position easily and safely reached by a secured ladder or a manhole access point.

#### COMPONENTS:

PRODUCT CODE	PRODUCT DESCRIPTION	QUANTITY
EYEBT002	Abseil Eyebolt: 316 SS with M16 Nut	1

Version 07.17

SafetyLink Pty Ltd | ABN 83 081 777 371  
Phone: 1300 789 545 or +61 2 4964 1068 | Fax: 1300 738 071 or +61 2 49641069  
[info@safetylink.com.au](mailto:info@safetylink.com.au) | [www.safetylink.com.au](http://www.safetylink.com.au)


PRODUCT SHEET

# POSITIONING LAYOUT


*This is a guide only*

All working at heights safety procedures must be complied with when installing SafetyLink anchor points. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.

**SPACING MUST BE NO GREATER THAN THE RAFTER LENGTH  
PLEASE CONTACT YOUR DISTRIBUTOR IF YOU ARE UNSURE**

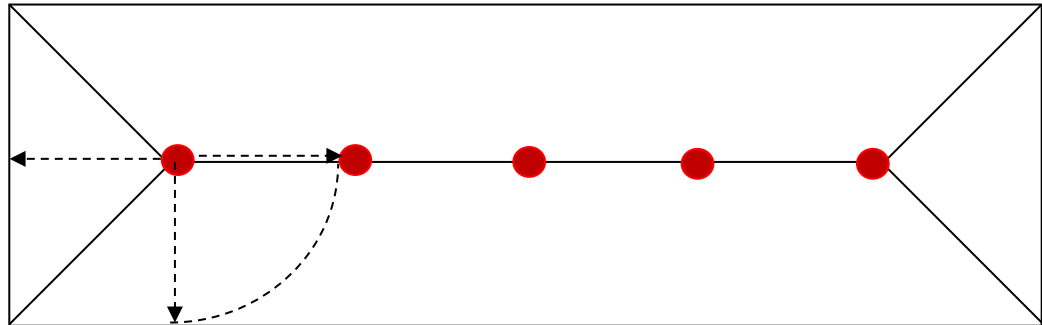

**ACCESS, LAYOUT & USE OF A SAFETYLINK ANCHOR SYSTEM**  
SafetyLink anchor points are positioned by calculating the pendulum effect, this limits the likelihood of a fall past the edge of the roof space. The pendulum effect still applies to a flat roof.

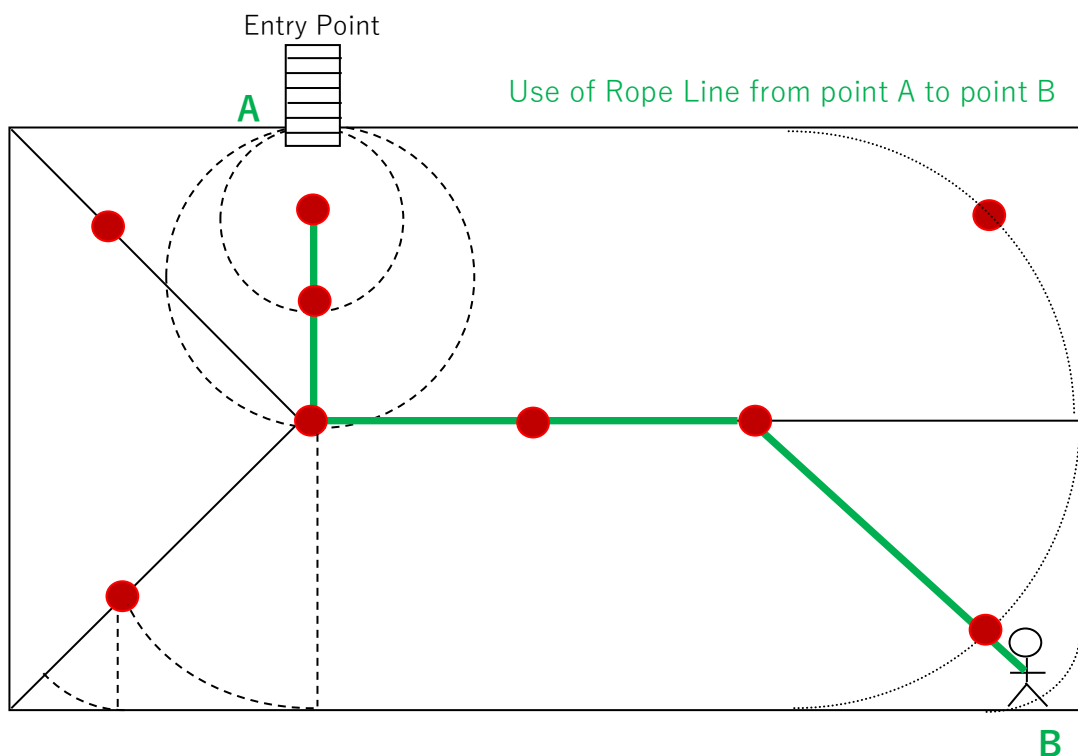

**SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.**



Anchor Catalogue



Anchor Installation Guide



Lifeline Catalogue



Lifeline Installation Guide



Ladder Catalogue



Ladder Installation Guide



FrogLine In Use



FrogLink Install Video



TileLink Install Video

Version 07.17

SafetyLink Pty Ltd | ABN 83 081 777 371  
Phone: 1300 789 545 or +61 2 4964 1068 | Fax: 1300 738 071 or +61 2 49641069  
info@safetylink.com.au | www.safetylink.com.au

PRODUCT SHEET



Anchor  
Catalogue



Anchor  
Installation Guide



Lifeline  
Catalogue



Lifeline  
Installation Guide



Ladder  
Catalogue



Ladder  
Installation Guide



FrogLine  
In Use



FrogLink  
Install Video



TileLink  
Install Video

# COPYRIGHT TERMS AND CONDITIONS

Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

## Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@heightsafety.com.au](mailto:ip@heightsafety.com.au) and quote the product code.

Version 07.17

SafetyLink Pty Ltd | ABN 83 081 777 371  
Phone: 1300 789 545 or +61 2 4964 1068 | Fax: 1300 738 071 or +61 2 49641069  
[info@safetylink.com.au](mailto:info@safetylink.com.au) | [www.safetylink.com.au](http://www.safetylink.com.au)

PRODUCT SHEET